






Technical data for frame 5 - row

For installation with a cut-out in the worktop.


The worktop decor is visible.

- Planning dimension 600mm
- Worktop depth ≥ 650 mm
- Outer frame dimension 564mm
- Extension distance 496mm - when extended, keep a distance of at least 200mm in all directions from other cabinets!
- Shelf load: max. 10kg at the top, max. 15kg at the bottom
- Can also be used in handleless kitchens
- **Tip!** At the end of the row: Place Qanto in 60 cm carcass, attach plinth to feet of carcass.
- **Tip!** In the row: use 2 x 25mm chipboard panels for screwing to the neighbouring carcasses, results in Standard dimension 600mm. Use standard 60 mm front.
- **Attention!** If a recess panel is used, its thickness should be taken into account during planning!

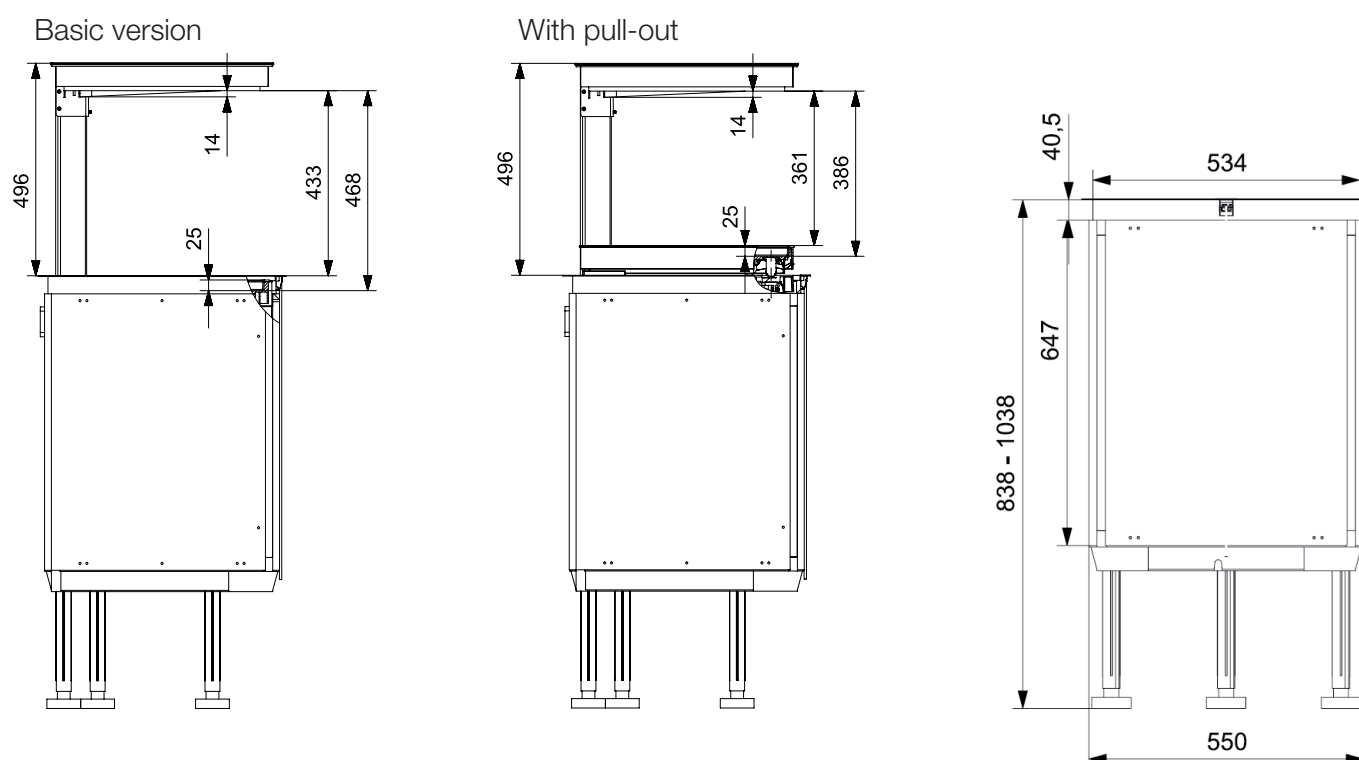

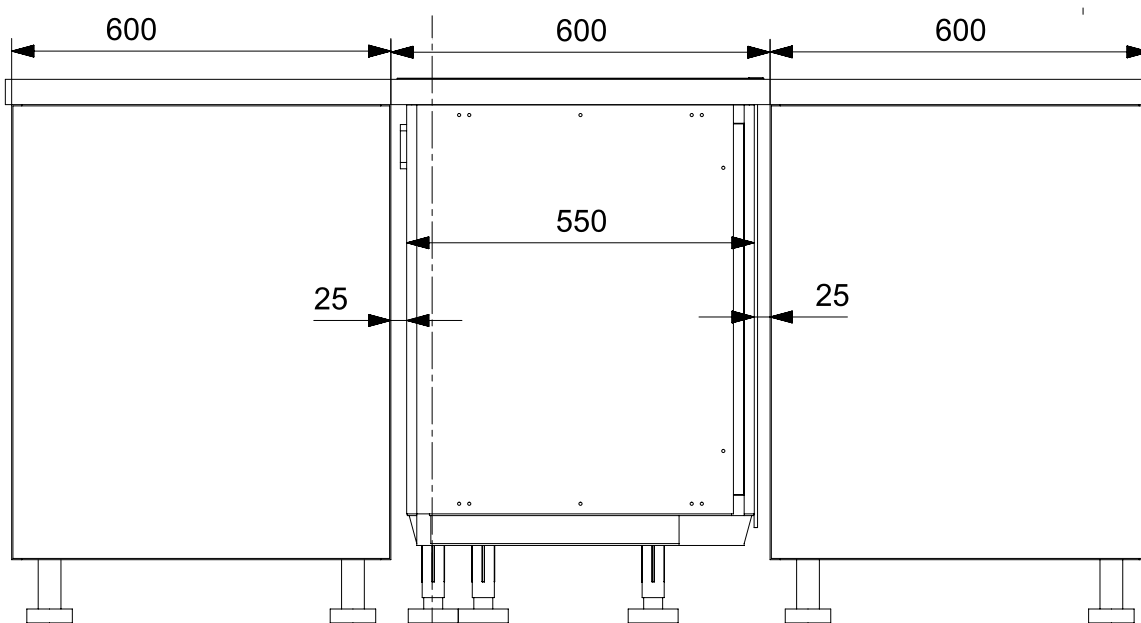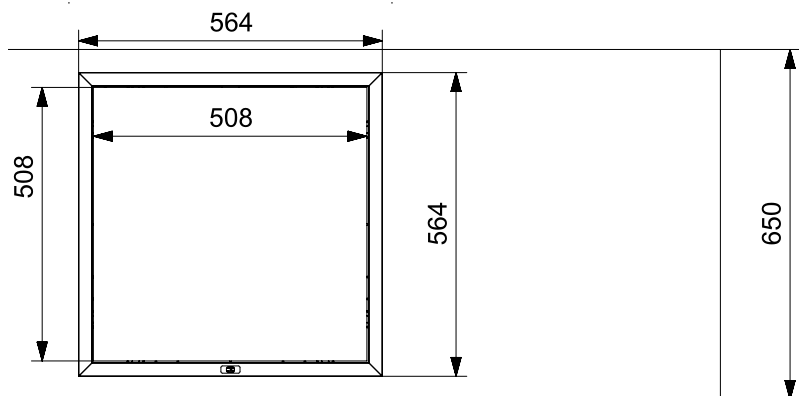

Cross-section frame

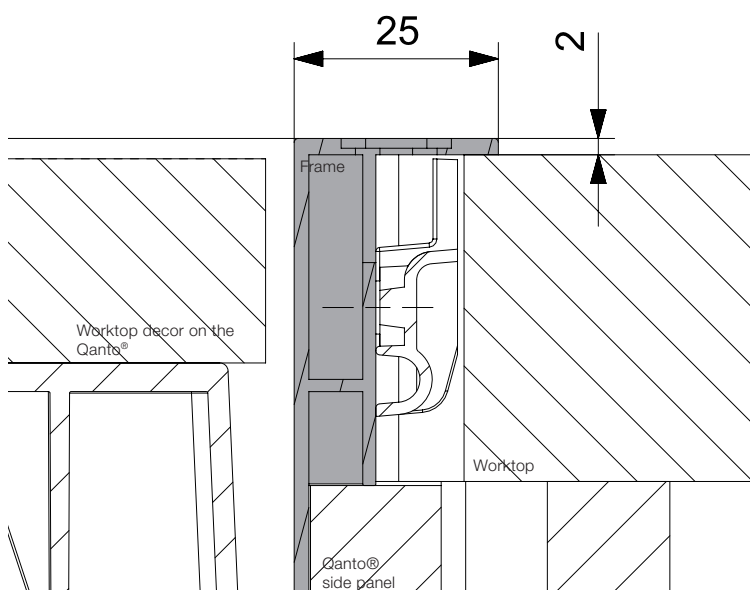

Assembly instructions



.stp-data

